THE PERFECT VIEW

ARCHITECTURAL COLLECTION

Aluminum Windows & Doors



tpvcommercial.com

THE PERFECT VIEW CUSTOM GLASS

REFERENCE DOCUMENTATION

Certificate

Australian Standard

As2047 refers to the mandatory minimum specification by the Building Code Australia (BCA) for windows and doors used in Australia. It includes compliance to the Glass Standard AS1288-glass in buildings. The Prima windows has been tested by a NTA approved testing facility for the achievement of As2047.

Florida Approval

Mandatory Tests (Tested in accordance with Florida Building Code Tests Protocols). Prima windows product has been evaluated for use inside and outside of the HVHZ (High Velocity Hurricane Zone).

NOA


This NOA is being issued under the applicable rules and regulations governing the use of construction materials. The documentation submitted has been reviewed and accepted by Miami-Dade County RER-Product Control Section to be used in Miami Dade County and other areas where allowed by the Authority Having Jurisdiction(AHJ).

NFRC

Every NFRC-rated window has a label affixed to it displaying its ratings. NFRC window ratings are the best available, as they are used by the U.S. Environmental Protection Agency's ENERGY STAR® program to evaluate windows.

CSA Group

Canadian and U.S. verification: Our marks prove that energy efficiency requirements outlined by Natural Resources Canada(NRCan), Canadian provincial energy efficiency regulations, California Energy Commission(CEC), and the U.S. Department of Energy (DOE) have been fully met.

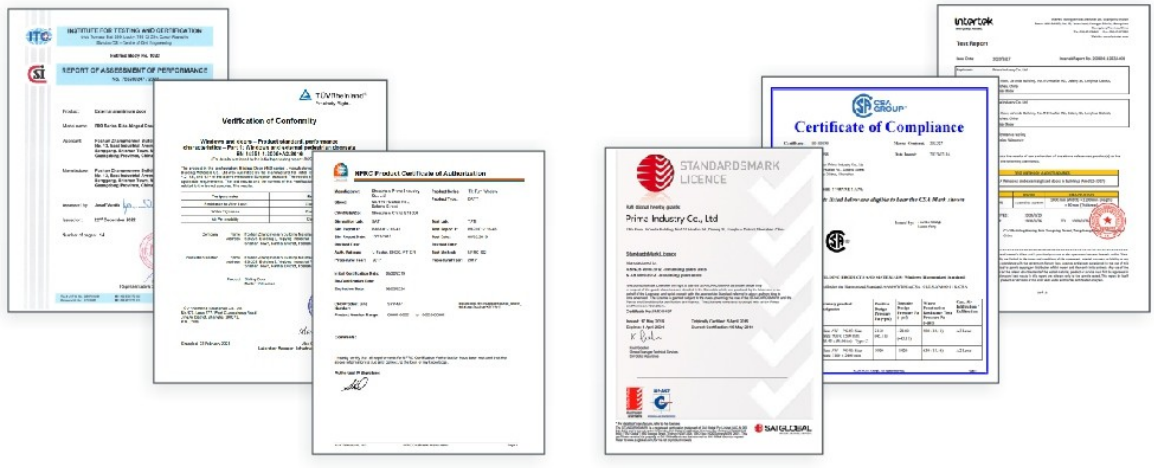





COLLECTION GUIDE

Contents

Aluminum Casement Window 01-02

81 series Casement Window &
Awning Window & Tilt & Turn Window 03-04

Aluminum Awning Window 05-06

Aluminum Tilt & Turn Window 07-08

Aluminum Sliding Window 09-10

Australia Standard Window and Door 11-12

Australia Standard Sliding Window and Door 13-14

American Standard Window and Door 15-17

Canada Standard Window and Door 18

Aluminum Louver Window 19-20

Aluminum Hung Window 21

Aluminum Window Nailing Fin 22

Aluminum Casement Door 23-24

Aluminum Sliding Door 25-28

Aluminum Bi-Fold Door 29-30

Aluminum Slim Frame Door 31-34

Aluminum Glass Curtain Wall 35-36

Glass Performance Description 37

Aluminum Profile Description 38-40

Aluminum Surface Color Swatch 41-42

Aluminum Hardware Details 43-44

SECTION A

Aluminum Casement Window

50 Series Casement Window

>> Specifications

Item No: PRM-50


Series: 50mm

Surface Finish: Powder coating

Glass: Single glass / 5+12A+5mm insulated clear tempered

Alu Thickness: 1.4/1.6mm

Hardware: Top Chinese brand

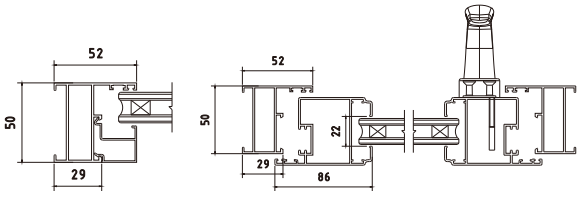



55 Series Casement Window

>> Specifications

Item No: PRM-55


Series: 55mm

Surface Finish: Powder coating

Glass: Single glass / 5+12A+5mm insulated clear tempered

Alu Thickness: 1.4 mm

Hardware: Top Chinese brand

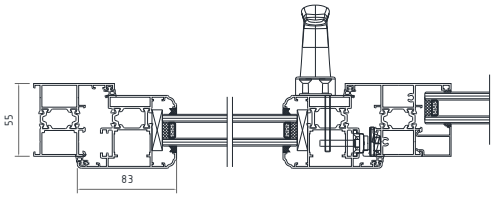

65 Series Casement Window

>> Specifications

Item No: PRM-65

Series: 65mm

Surface Finish: Powder coating

Glass: Single glass / 5+12A+5mm insulated clear tempered

Alu Thickness: 1.8mm

Hardware: Top Chinese brand



108 Series
Casement Window

>> Specifications

Item No: PRM-108

Series: 108mm


Surface Finish: Powder coating

Glass: 5+27A+5mm insulated clear tempered with stainless steel mesh


Alu Thickness: 1.4/1.6/2.0mm

Hardware: Top Chinese brand

outside

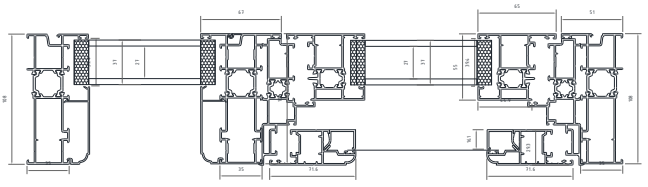

inside

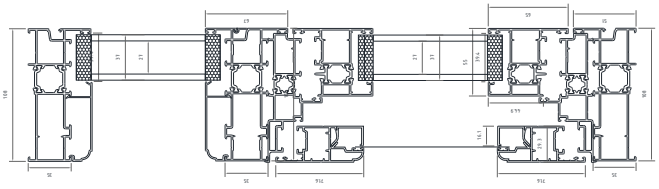

SECTION B

81 series Casement Window & Awning Window & Tilt & Turn Window

>> Specifications

Item No: PRD-81-01

Series: 81mm

Surface Finish: Powder coating / PVDF coating


Glass: 5+27A+5mm insulated tempered glass


Alu Thickness: 2.0 mm


Hardware: Top Chinese brand


Aluminum Profile: Thermal break



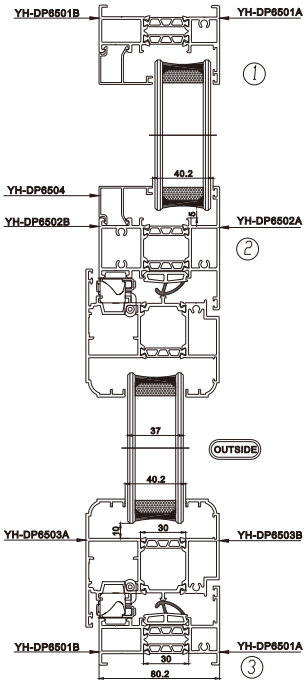

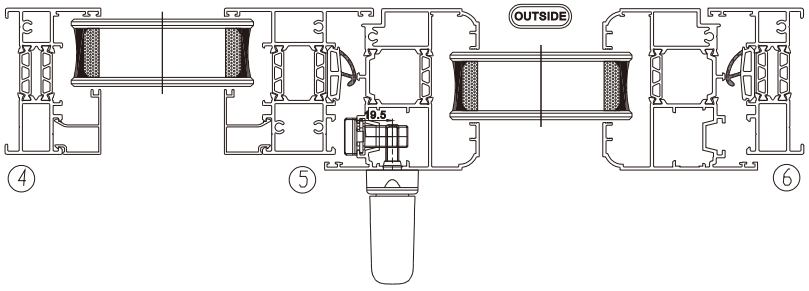

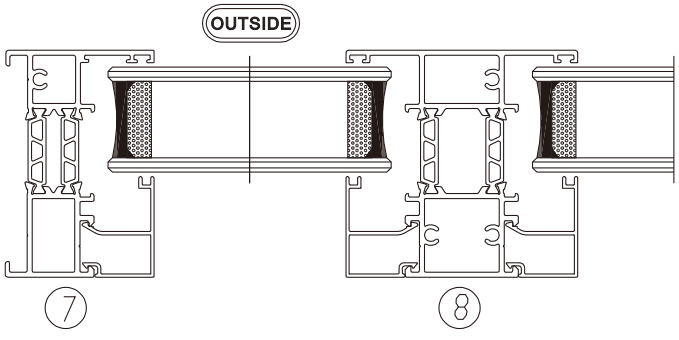

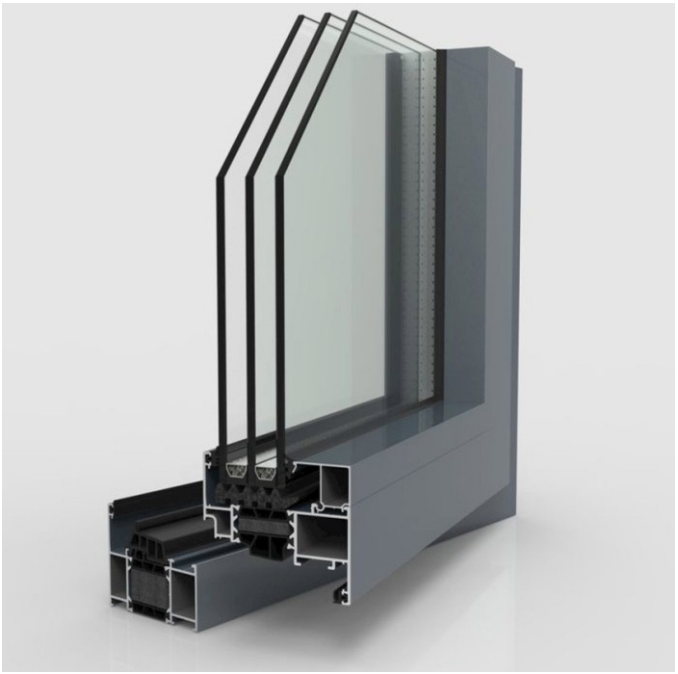





SECTION C

Aluminum Awning Window

50 Series
Awning Window

>> Specifications

Item No: PRW-50-03

Series: 50mm

Surface Finish: Powder coating / PVDF coating


Glass: 5+12A+5mm insulated tempered glass

Alu Thickness: 1.4 / 1.6mm

Hardware: Top Chinese brand





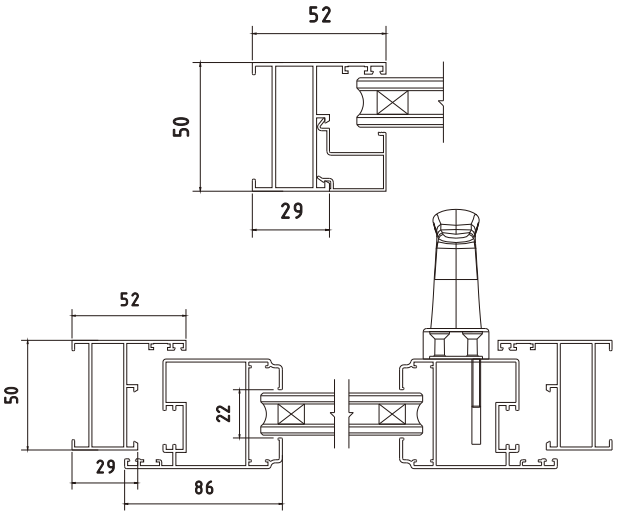

55 Series
Casement Window

>> Specifications

Item No: PRM-55


Series: 55mm

Surface Finish: Powder coating

Glass: Single glass / 5+12A+5mm insulated clear tempered

Alu Thickness: 1.4 mm

Hardware: Top Chinese brand

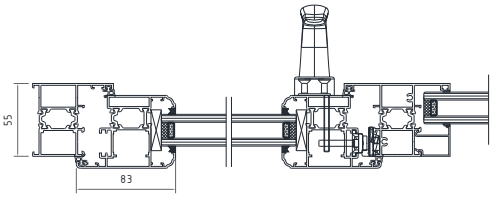

65 Series
Casement Window

>> Specifications

Item No: PRM-65

Series: 65mm

Surface Finish: Powder coating

Glass: Single glass / 5+12A+5mm insulated clear tempered

Alu Thickness: 1.8mm

Hardware: Top Chinese brand

108 Series
Awning Window

>> Specifications

Item No: PRM-108-03

Series: 108mm

Surface Finish: Powder coating / PVDF coating


Glass: 5+27A+5mm insulated tempered glass

Alu Thickness: 1.4 / 1.6 / 2.0mm


Hardware: Top Chinese brand

Optional Configurations: Window Screen/Grille

outside

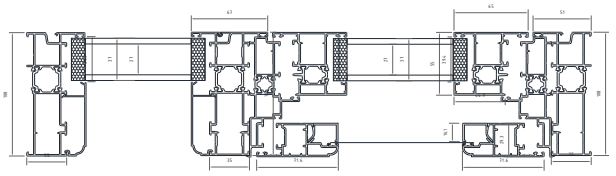

inside

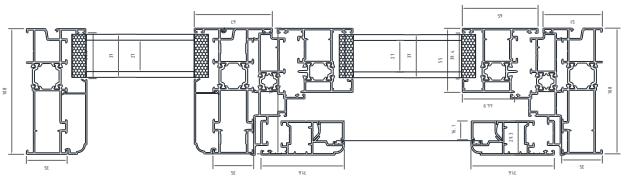



SECTION D

Aluminum Tilt & Turn Window

50 Series
Tilt & Turn Window

>> Specifications


Item No: PRW-50-04

Series: 50mm

Surface Finish: Powder coating / PVDF coating

Glass: 5+12A+5mm insulated tempered glass

Alu Thickness: 1.4 / 1.6mm

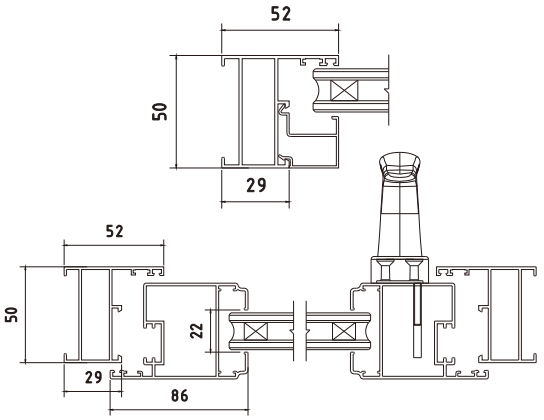

55 Series
Casement Window

>> Specifications

Item No: PRM-55


Series: 55mm

Surface Finish: Powder coating

Glass: Single glass / 5+12A+5mm insulated clear tempered

Alu Thickness: 1.4 mm

Hardware: Top Chinese brand

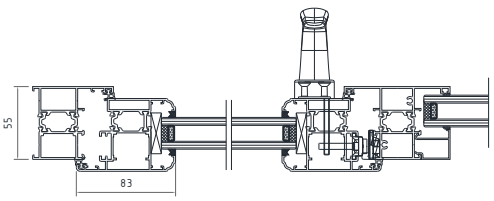

65 Series
Casement Window

>> Specifications

Item No: PRM-65

Series: 65mm

Surface Finish: Powder coating

Glass: Single glass / 5+12A+5mm insulated clear tempered

Alu Thickness: 1.8mm

Hardware: Top Chinese brand



108 Series
Tilt & Turn Window

>> Specifications

Item No: PRM-108-04

Series: 108mm

Surface Finish: Powder coating / PVDF coating


Glass: 5+27A+5mm insulated tempered glass

Alu Thickness: 1.4 / 1.6 / 2.0mm


Hardware: Top Chinese brand

Optional Configurations: Window Screen / Grille

outside

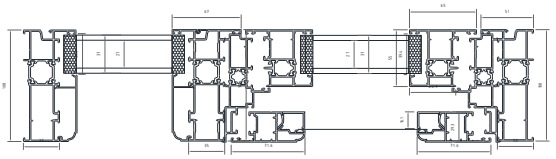

inside

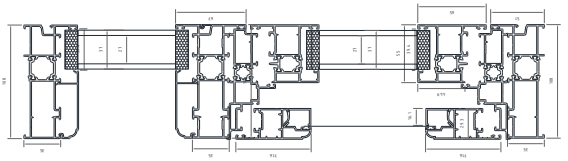



SECTION E

Aluminum Sliding Window

73 Series
Sliding Window

>> Specifications

Item No: PRW-73-01

Series: 73mm


Surface Finish: Powder coating / PVDF coating

Glass: 5+12A+5mm insulated tempered glass

Alu Thickness: 1.4 / 1.6mm

Hardware: Top Chinese brand

Aluminum Profile: Thermal break / Non-thermal break

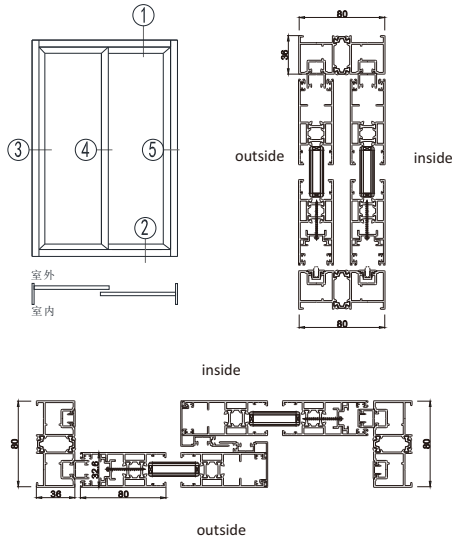



110 Series
Sliding Window





>> Specifications

Item No: PRM-110-01

Series: 110mm

Surface Finish: Powder coating / PVDF coating

Glass: 5+12A+5mm insulated tempered glass

Alu Thickness: 1.4 / 1.6mm

Hardware: Top Chinese brand


Aluminum Profile: Thermal break / Non-thermal break



SECTION F

Australia Standard Window and Door

100 Series
Australia Standard Window And Door (Residential Standard)

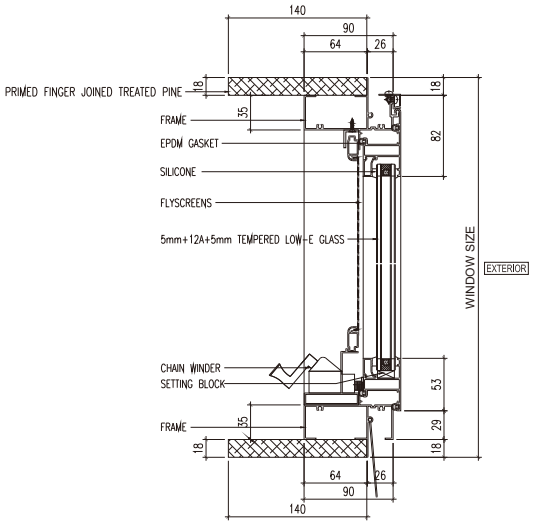

>> Specifications

Item No: PRA-100-01

Series: 100mm

Surface Finish: Powder coating / PVDF coating

Glass: 5+9A+5mm insulated tempered glass

Alu Thickness: 1.4mm


Hardware: Australia Doric / China Kinlong

Fin: Wooden Fin

Awning Window with timber reveal





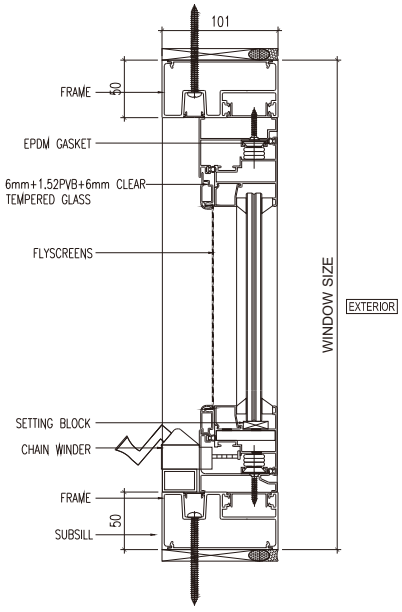















SECTION G

Australia Standard Sliding Window and Door

AS 87/130 Series
Non-Thermal Break
Integrated Screen & Window Series

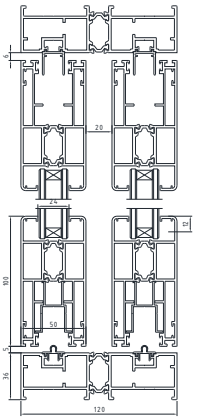

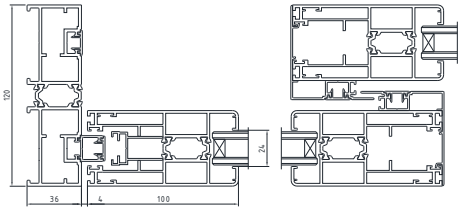

>> Specifications

Item No: PRA-87/130-01

Profile Thickness: Non-thermal break, 2.0mm

Glass Groove Width: 25mm (Recommended glass: 5+12A+5mm)

Window/Door Type: Sliding window/Sliding door

Size Limitation: Width ≥ 800mm; 600mm ≤ Height ≤3000mm

Matching Screen: Stainless steel screen (external-mounted), available in fiberglass or PET material

Application: Suitable for Australian projects. Integrated screen and glass sash design ensures excellent wind load resistance and airtightness.












SECTION H

American Standard Window and Door


NFRC Certificate


NFRC Certificate(National Fenestration Rating Council),It is a non-profit organization dedicated to promoting the continuous improvement of windows, doors and skylights to make buildings more comfortable and energy efficient.

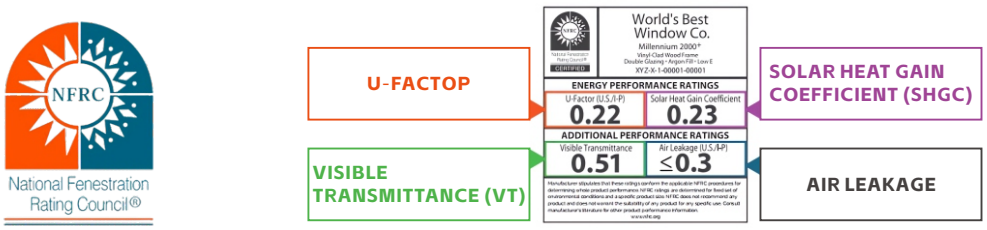

- U-Factor (Orange area) indicates the U value of windows and doors, which is the thermal insulation value. The range is: 0.20-1.20. The lower, the better.
- Visible Transmittance (Green area) Range: 0-1, the higher, the better.
- Solar Heat Gain Coefficient (Purple area) A parameter that measures the increase in interior temperature due to light, the range is: 0-1, the lower the better.
- Air Leakage (Blue area) Measures the value of air entering the interior, range: 0.1-0.3, the lower the better.

K80 Series Casement window, Profile thickness:2.0mm

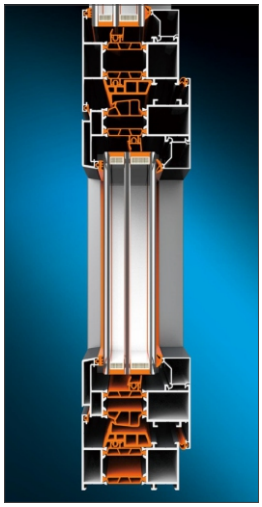

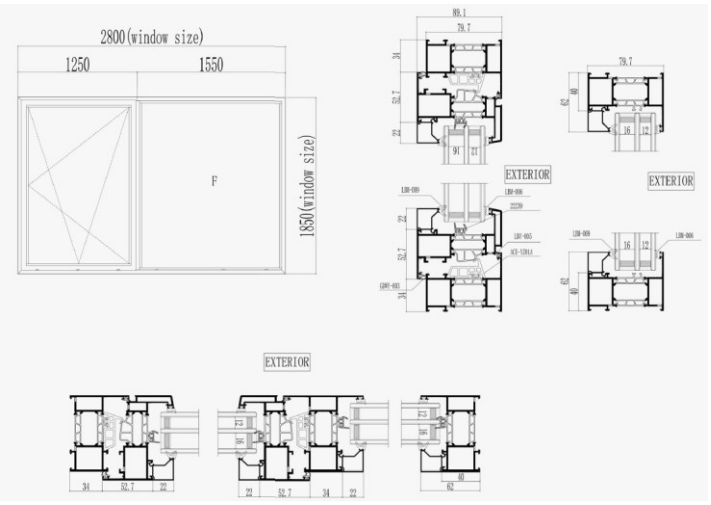

Basic parameters:

Thermal insulation properties:
UW1.4W/m² K


Wind pressure resistance performance:
+5040Pa

Sound insulation performance:
Rw up to 37dB

watertight performance:
+720Pa


K80 Series Casement Door, Profile Thickness: 2.0mm






PRODUCT DETAILS



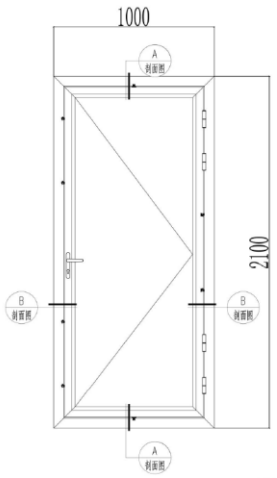

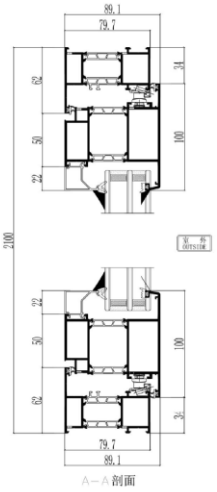

Basic parameters:

Thermal insulation properties:
UW1.4W/m² K

Wind pressure resistance performance:
+5040Pa


Sound insulation performance:
Rw up to 37dB

watertight performance:
+1050Pa

150 Series Sliding door, Profile Thickness:2.0mm





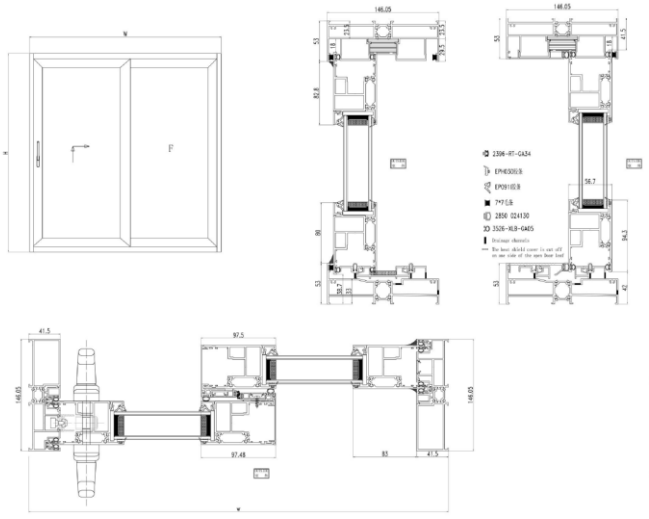

Basic parameters:


Thermal insulation properties:
UW1.7W/m² K


Wind pressure resistance performance:
+3600Pa

Sound insulation performance:
Rw up to 37dB

watertight performance:
+720Pa


K80 Series Bi-Fold Door, Profile Thickness: 2.0mm

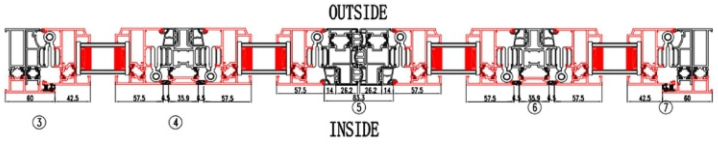















Basic parameters:

- Thermal insulation properties: **UW1.7W/m² K**
- Wind pressure resistance performance: **+3600Pa**
- Sound insulation performance: **Rw up to 37dB**
- watertight performance: **+720Pa**

125 Series Silm Sliding door, Profile Thickness: 3.0mm













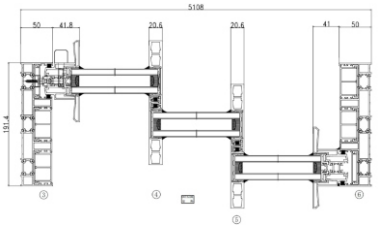



Basic parameters:

- Thermal insulation properties: **UW1.5W/m² K**
- Wind pressure resistance performance: **+2160Pa**
- Sound insulation performance: **Rw up to 37dB**
- watertight performance: **+330Pa**

SECTION I

Canada Standard Window and Door

The CSA certification is one of the most well-known product safety approval standard in the world and is widely accepted and recognized by the global market, especially in North America. CSA International is licensed by the U.S. Occupational Safety and Health Administration (OSHA), listed as a U.S. Nationally Recognized Laboratory (NRTL), and authorized by the Standards Council of Canada (SCC).
In the United States and Canada, the CSA mark is recognized by regulatory authorities in health and safety, electrical, gas, construction, bathroom and many other fields. Therefore, CSA is the threshold of the Canadian market.
CSA certified windows and doors are the same product as NFRC certified.

K80 Series Casement Door ,Profile Thickness: 2.0mm


Thermal insulation properties:
UW1.4W/m² K

Wind pressure resistance performance:
+5040Pa

Sound insulation performance:
Rw up to 37dB


watertight performance:
+1050Pa






PRODUCT DETAILS



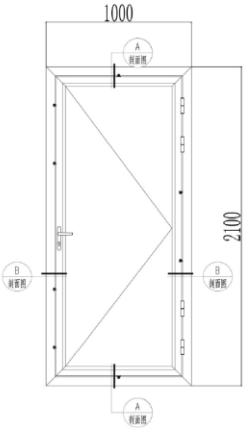

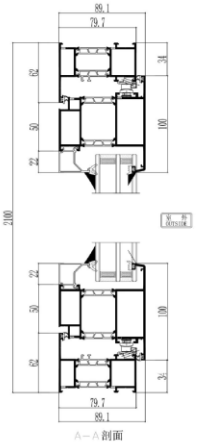

150 Series Sliding door, Profile Thickness:2.0mm

Thermal insulation properties:
UW1.7W/m² K


Wind pressure resistance performance:
+3600Pa

Sound insulation performance:
Rw up to 37dB

watertight performance:
+720Pa





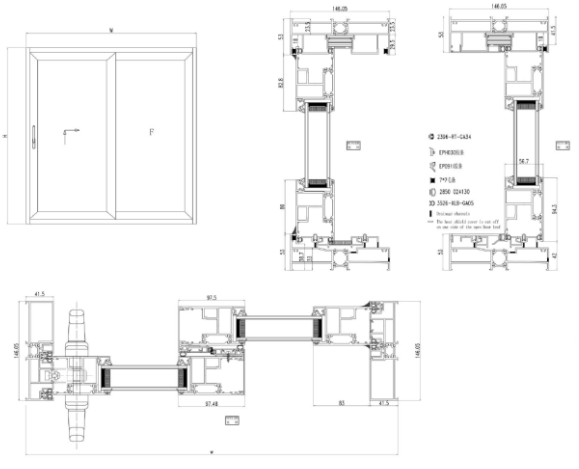

SECTION J

Aluminum Louver Window

50 Series Aluminum Louver

>> Specifications

Item No: PRW-50-01

louver Series: 50mm

Surface Finish: Powder coating

Louver Thickness: 1.1mm

Hardware: Top Chinese brand

Style: Fixed Louver / close-open louver







100 Series Aluminum Louver

>> Specifications

Item No: PRW-100-01

louver Series: 100mm

Surface Finish: Powder coating

Louver Thickness: 1.1mm

Hardware: Top Chinese brand

Style: Fixed Louver / close-open louver

100 Series
Aluminum Glass Louver

>> Specifications

Item No: PRX-100

Louver Series: 100mm

Surface Finish: Powder coating

Glass: 6mm tempered glass

Alu Thickness: 2.0mm

Hardware: Top Chinese brand








SECTION K

Aluminum Hung Window

83 Series Hung Window

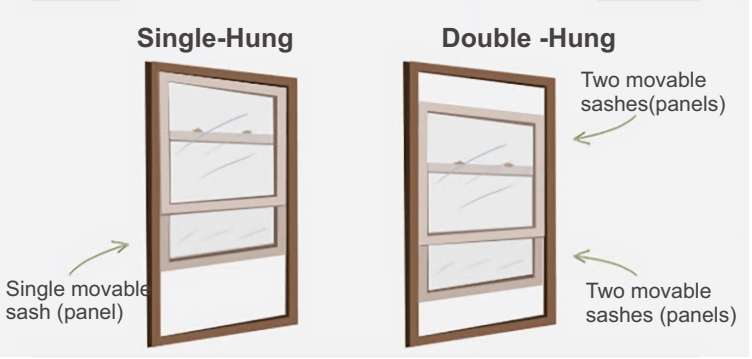

>> Specifications

Item No: PRW-83-01

Series: 83mm

Surface Finish: Powder coating

Glass: 5+12A+5mm insulated tempered glass

Alu Thickness: 1.4 / 1.6mm

Hardware: Covey USA

Type: Single Hung / Double Hung

Aluminum Profile: Thermal break / Non-thermal break



SECTION L

Aluminum Window Nailing Fin


Aluminum Nailing Fin


>> Specifications

Item No: PRM-NF-01

Surface Finish: Powder coating

Function: Supporting installation

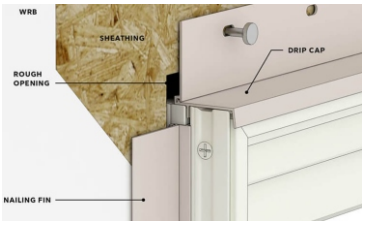

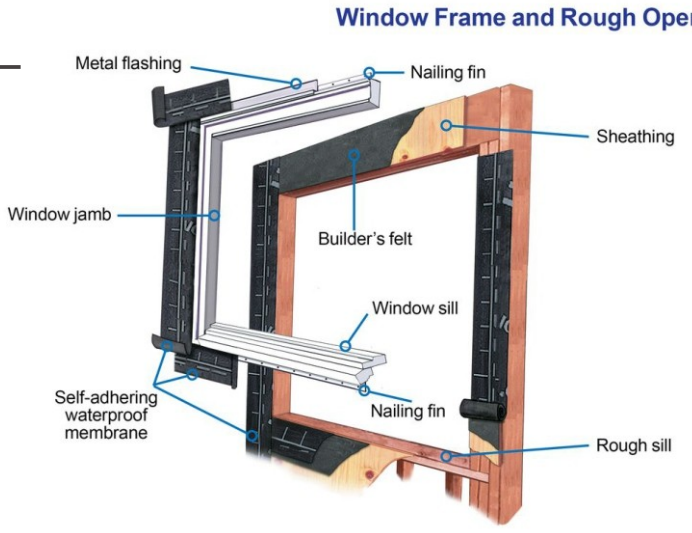



SECTION M

Aluminum Casement Door

50 Series Casement Door

>> Specifications

Item No: PRD-50-01


Series: 50mm

Surface Finish: Powder coating / PVDF coating

Glass: 5+12A+5mm insulated tempered glass

Alu Thickness: 1.4 / 1.6mm

Hardware: Top Chinese brand

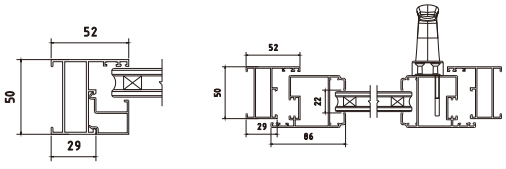



55 Series Casement Door

>> Specifications

Item No: PRD-55-01


Series: 55mm


Surface Finish: Powder coating / PVDF coating

Glass: 5+12A+5mm insulated tempered glass

Alu Thickness: 1.4 mm

Hardware: Top Chinese brand



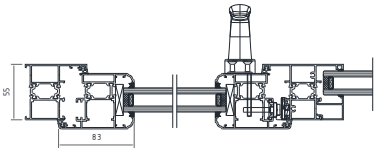

65 Series Casement Door

>> Specifications

Item No: PRD-65-01


Series: 65mm

Surface Finish: Powder coating / PVDF coating

Glass: 5+12A+5mm insulated tempered glass

Alu Thickness: 1.8mm

Hardware: Top Chinese brand



108 Series
Casement Door

>> Specifications

Item No: PRD-108-01

Series: 108mm


Surface Finish: Powder coating / PVDF coating

Glass: 5+27A+5mm insulated tempered glass


Alu Thickness: 1.4 / 1.6 / 2.0mm

Hardware: Top Chinese brand

outside

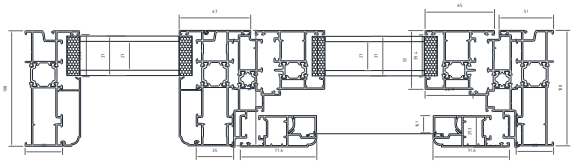

inside

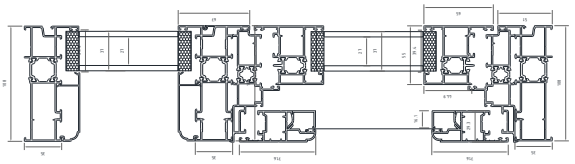

81 Series
Casement Door

>> Specifications

Item No: PRD-81-01

Series: 81mm

Surface Finish: Powder coating / PVDF coating


Glass: 5+27A+5mm insulated tempered glass

Alu Thickness: 2.0 mm

Hardware: Top Chinese brand

Aluminum Profile: Thermal break




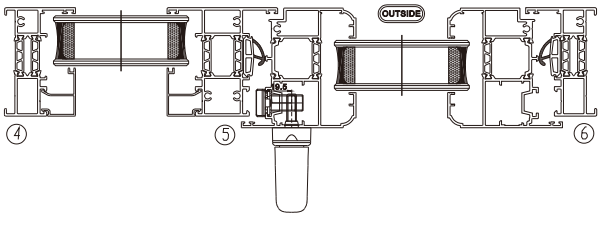

SECTION N

Aluminum Sliding Door

121 Series
Sliding Door

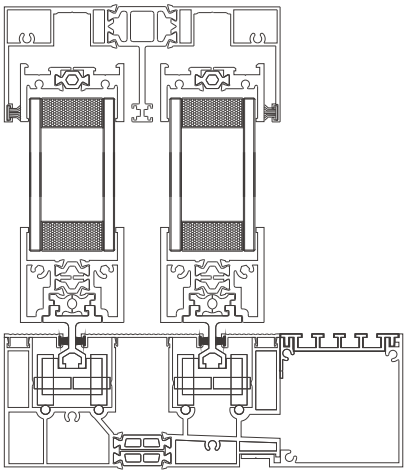

>> Specifications

Item No: PRA-121-01

Profile Thickness: 3.0-6.0mm

Glass Groove Width: 38mm (Recommended glass: Matched according to actual dimensions)

Window/Door Type: Heavy-duty narrow-frame sliding door

Size Limitation: Single sash width ≤ 2000mm; Single sash height ≤ 4000mm

Matching Screen: External-mounted screen (Available in fiberglass or PET material)

Application: Suitable for high-end projects. Features excellent wind load resistance, airtightness, drainage performance, and functions as a full-view sliding door.










132/202 Series Sliding Door

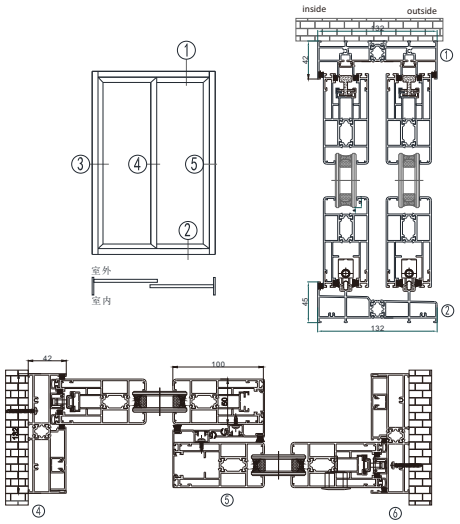

>> Specifications

Item No: PRD-132-01 / PRD-202-01

Series: 132 / 202mm

Surface Finish: Powder coating / PVDF coating

Glass: 5+12A+5mm insulated tempered glass

Alu Thickness: 1.6 / 2.0mm

Hardware: Top Chinese brand

Aluminum Profile: Thermal break / Non-thermal break







SECTION O

Aluminum Bi-Fold Door

75 Series
Bi-Fold Door

>> Specifications

Item No: PRD-75-01

Series: 75mm

Surface Finish: Powder coating / PVDF coating


Glass: 5+27A+5mm insulated tempered glass

Alu Thickness: 1.8mm

Hardware: Top Chinese brand

Style: Single Panel

Aluminum Profile: Thermal break / Non-thermal break

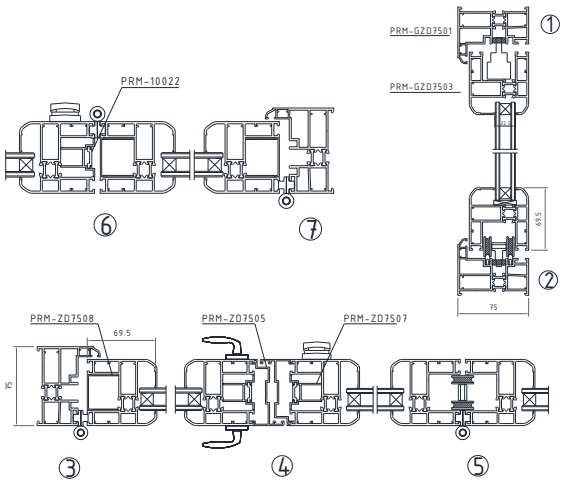



70 Series
Bi-Fold Door

>> Specifications

Item No: PRD-70-01

Series: 70mm

Surface Finish: Powder coating / PVDF coating

Glass: 5+27A+5mm insulated tempered glass

Alu Thickness: 1.8mm

Hardware: Top Chinese brand

Style: Double Panel


Aluminum Profile: Thermal break / Non-thermal break




SECTION P

Aluminum Slim Frame Door

16 Series
Slim Sliding Door



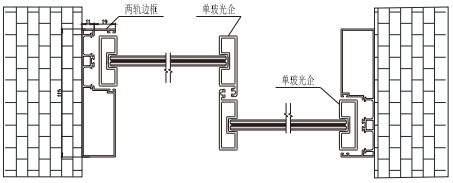

>> Specifications

Item No: PRS-16-01

Series: 16mm

Surface Finish: Powder coating

Glass: 8mm single glass / 5+6A+5mm / 5+6A / 9A+5mm insulated tempered glass / 4+0.76pvb+4mm laminated glass

Alu Thickness: 2.0mm


Hardware: Top Chinese brand









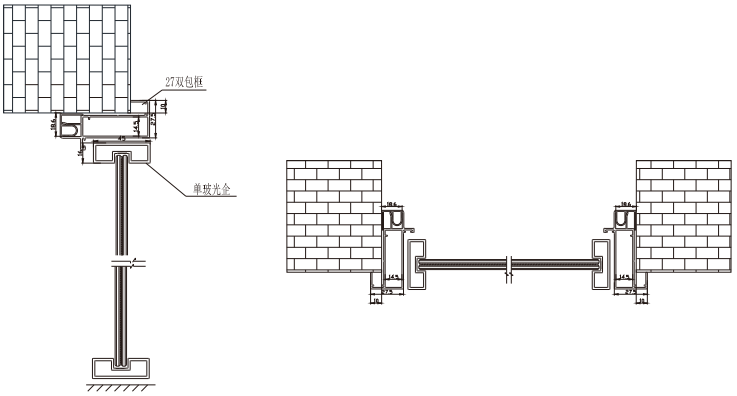

16 Series
Slim Casement Door

>> Specifications

Item No: PRS-16-05

Series: 16mm

Surface Finish: Powder coating

Glass: 8mm single glass / 5+6A+5mm / 5+6A / 9A+5mm insulated tempered glass / 4+0.76pvb+4mm laminated glass

Alu Thickness: 2.0mm

Hardware: Top Chinese brand











SECTION Q

Aluminum Glass Curtain Wall

Aluminum Curtain Wall

>> Specifications


Item No: PR-ACW

Surface Finish: Powder coating / PVDF coating

Glass: Customized glass thickness

Alu Thickness: Customized

Application: Commercial Buildings








BUSES





SECTION R

Glass Performance Description

All glasses for window and door are tempered safety glass.

Single-pane glass is suitable for interiors and areas where the temperature difference is small, and it is a cost-effective option.

Insulated glass has better heat and sound insulation effect.

Laminated glass is the safest type of glass available.

Our professional sales manager will suggest the suitable glass type for your specific needs.



Tempered Glass




Single Glass



Double Glass




Tinted Glass




Reflective Glass



Laminated Glass



Low-e Glass



Frosted Glass




Arc Glass


SECTION S


Aluminum Profile Description


The aluminum profile for windows and doors is made of high-strength 6063-T5 aluminum alloy. It offers excellent performance, including lightweight construction, high hardness, corrosion resistance, ease of processing, simple maintenance, low cost, and an attractive finish.

Our window and door systems are designed by our engineers to ensure your safety and comfort.

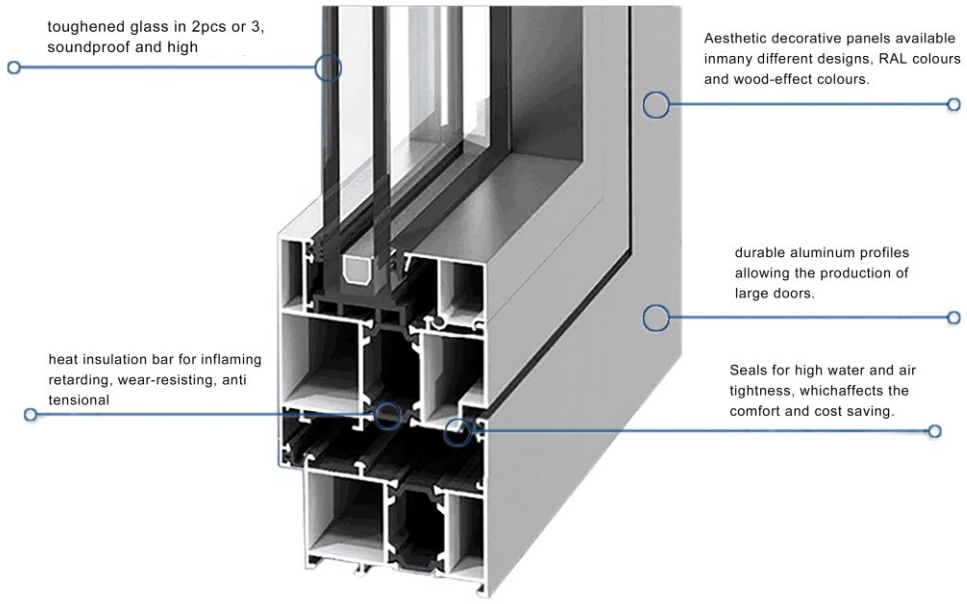



Bronze



Dark Green



Dark Grey


Woodgrain Finish


Woodgrain Finish


Silver

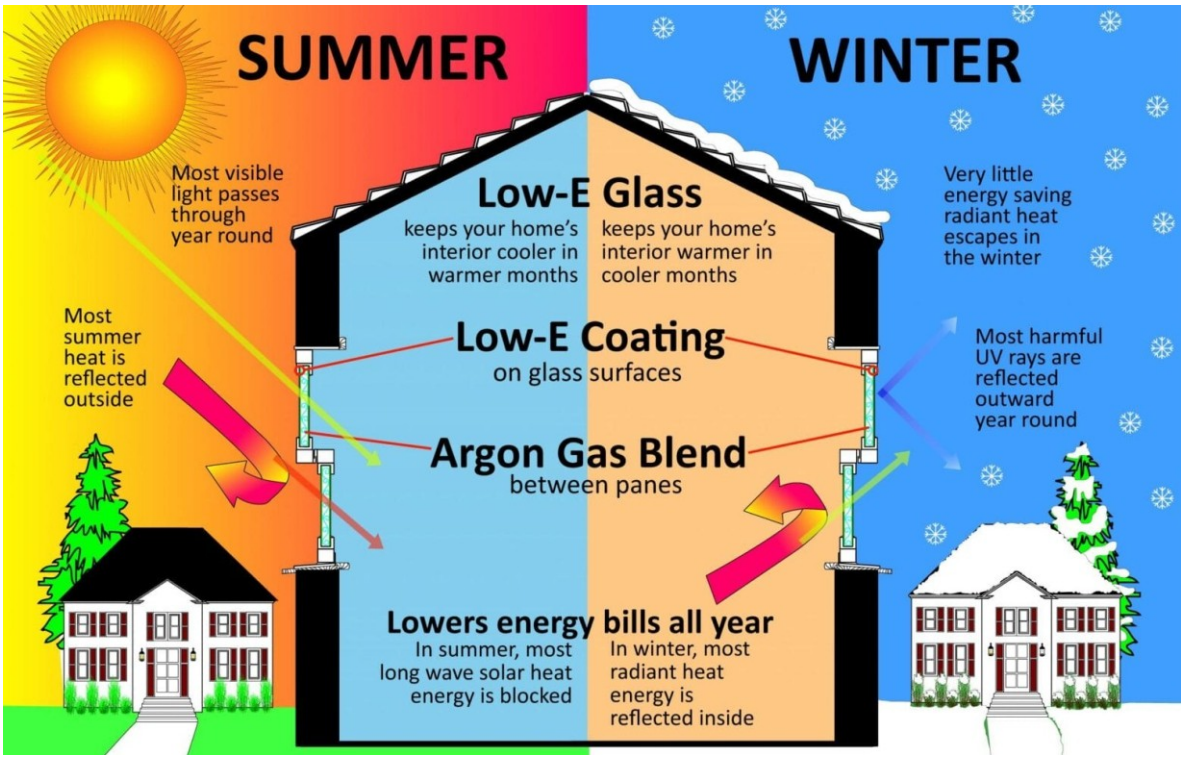
SUMMER
WINTER
Most visible light passes through year round
Low-E Glass
keeps your home's interior cooler in warmer months
keeps your home's interior warmer in cooler months
Very little energy saving radiant heat escapes in the winter
Most summer heat is reflected outside
Low-E Coating
on glass surfaces
Most harmful UV rays are reflected outward year round
Argon Gas Blend
between panes
Lowers energy bills all year
In summer, most long wave solar heat energy is blocked
In winter, most radiant heat energy is reflected inside

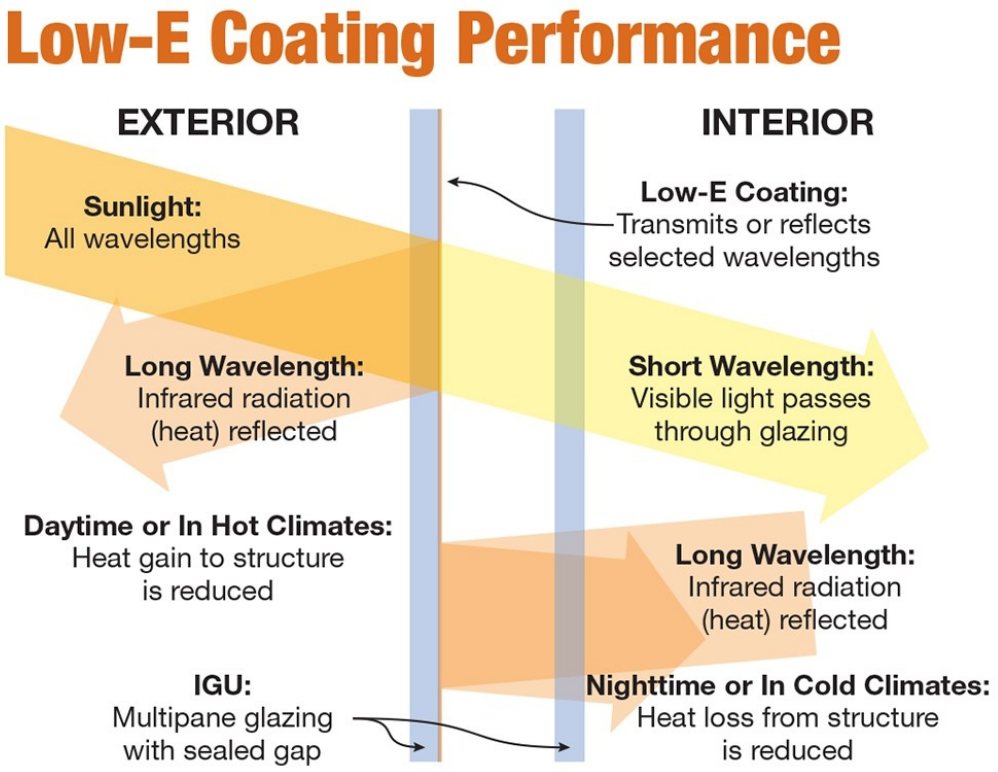
Low-E Coating Performance
EXTERIOR
INTERIOR
Sunlight:
All wavelengths
Low-E Coating:
Transmits or reflects selected wavelengths
Long Wavelength:
Infrared radiation (heat) reflected
Short Wavelength:
Visible light passes through glazing
Daytime or In Hot Climates:
Heat gain to structure is reduced
Long Wavelength:
Infrared radiation (heat) reflected
IGU:
Multipane glazing with sealed gap
Nighttime or In Cold Climates:
Heat loss from structure is reduced

Glass Performance Data

Model	Glass type	Visible light (%)			USA ASHRAE				
		Transmittance	Reflectivity		U-value (winter) (w/m2.k)	U-value (winter) (w/m2.k)	Shading factor	G	G-value relative heating (w/m2.k)
			Inside	Outside					
XETN180	5XETN180#2+6A+5C	73	10	11	2.50	2.54	0.67	0.59	445
	6XETN180#2+9A+6C	72	10	11	2.04	2.11	0.65	0.57	427
	6XETN180#2+12A+6C	72	10	11	1.85	1.85	0.65	0.56	424
	8XETN180#2+12A+8C	71	10	11	1.83	1.84	0.64	0.55	416
	10XETN180#2+12A+10C	69	10	11	1.82	1.83	0.61	0.53	399
XETS140	5XETS140#2+6A+5C	36	29	9	2.47	2.50	0.37	0.32	249
	6XETS140#2+9A+6C	36	29	9	2.00	2.06	0.35	0.30	235
	6XETS140#2+12A+6C	36	29	9	1.80	1.80	0.34	0.30	229
	8XETS140#2+12A+8C	35	29	9	1.78	1.78	0.34	0.29	226
	10XETS140#2+12A+10C	34	28	9	1.77	1.77	0.33	0.28	220
XETS150	5XETS150#2+6A+5C	45	29	12	2.44	2.47	0.41	0.36	280
	6XETS150#2+9A+6C	44	29	12	1.97	2.02	0.40	0.34	266
	6XETS150#2+12A+6C	44	29	12	1.76	1.75	0.39	0.34	260
	8XETS150#2+12A+8C	44	28	12	1.75	1.74	0.39	0.33	256
	10XETS150#2+12A+10C	43	28	12	1.74	1.72	0.37	0.32	249
XETS160	5XETS160#2+6A+5C	54	22	10	2.47	2.50	0.47	0.41	318
	6XETS160#2+9A+6C	53	22	10	2.00	2.06	0.45	0.39	303
	6XETS160#2+12A+6C	53	22	10	1.80	1.80	0.45	0.39	298
	8XETS160#2+12A+8C	52	22	10	1.79	1.78	0.44	0.38	293
	10XETS160#2+12A+10C	51	21	10	1.77	1.77	0.43	0.37	284
XETG150	5XETG150#2+6A+5C	45	22	9	2.48	2.51	0.43	0.38	293
	6XETG150#2+9A+6C	44	22	8	2.02	2.08	0.41	0.36	277

Illustration:


1. The data in the sheet are calculated by Windows 5.2 provided by LNBL laboratory according to the international standard ISO9050-2003 and the domestic industry standard JGJ/T 151-2008 external conditions. The solar spectrum range: 300--2500nm;Visible light range: 380-780nm;Winter night: outdoor temperature -20°C, indoor temperature 20°C;Daytime in summer: the outdoor temperature is 30°C, and the indoor temperature is 25°C;Wind speed 2.8m/s;The solar density is 500w/m^2.

2. The above data are calculated values measured on samples.


SECTION T

Aluminum Surface Color Swatch

Smooth white
YH−MYT−14516




Matte black
YH−180630



Sand black
YH−180632



Satin brown
YH−JZ-04



Sand grey
YH−PT−271



American rosewood
YH−JZ-19



Golden Beech
YH−HM-1498



Golden oak
YH−JZ-22



Forest wood grain
YH−200509



White oak wood grain
YH−JZ-15



Teak wood grian
YH−MYT-14151



Platinum gold
YH−200524



Sandal Wood
YH−PLH5-51



Galaxy dark brown
YH−22189



Slate Grey
YH−180607



Fluorine Titanium Gray
YH−200542



Galaxy Grey
YH−22203

SECTION U

Aluminum Hardware Details



Casement window & Owing window & Turn and tilt window handle



Casement window hinges



Turn and tilt window hinges accessories



Sliding window lock



Sliding window pulley



Transmission box



Sliding door heavy duty pulley



Sliding door handle




Sliding door lock



Sliding door pulley



Bi-fold door hinge with handle



Bi-fold door hinge



Bi-fold door pulley



Bi-fold door handle



Casemnet door lock cylinder



Casement door hinge



Casement door handle



Casement door lock




Casement door electronic lock

Scilia



Handle



Lock



Casement door accessories



Casement door handle

Noto



Hinge



Turn and tilt window accessories



Handle



Transmission box



Casement door accessories

German Hobo



Handle



Casement door handle

SECTION W

Aluminum Window & Door Project

Turks Caicos Islands Residentail House Project



Australia Commercial Condo Project



Toronto Office Building Project



Rental Apartment Building Project





Cayman Town House Building Project



Residential Duplex Building Project



Commercial Building Project



Commercial Condo Project



Canadian Library Project



Canadian Duplex Building Project





Jamaica Commercial Building Project



Jamaica Rental Apartment Project



Jamaica Townhouse Apartment Project



YOUR NEXT PROJECT

Bring the next view into focus.

Architectural aluminum windows, doors and glazing systems selected around your opening, your design and your performance requirements.

WINDOWS

Casement, awning, tilt-and-turn, sliding and hung systems.

DOORS

Hinged, sliding, bi-fold and slim-frame configurations.

ARCHITECTURAL GLAZING

Curtain walls, glass options, surface finishes and coordinated hardware.

THE PERFECT VIEW

FROM CONCEPT TO SPECIFICATION

Start with the details.

Share the information below so we can develop the right next step for your project.

01 **Plans & openings**

Drawings, rough dimensions, quantities and preferred operation.

02 **Glass & finish**

Glass appearance, finish direction and hardware preferences.

03 **Performance requirements**

Project location and the energy, structural or other requirements in your specification.

04 **Schedule & scope**

Target timing, delivery needs and installation scope.

(212)-464-7433

tpvcommercial.com



Built around your view.

ALUMINUM WINDOWS & DOORS

(212)-464-7433

tpvcommercial.com

Theperfectviewdesign@gmail.com

info@Tpvcommercial.com

@tpvglass